



SINCE 1909
JAPAN



METAL

Ceiling Mount Ventilating Fan

• 24CMUA • 24CMHA • 27CMHA

High Performance

- Sirocco fan sustains high static pressure with low noise operation
- Seam-processed casing ensures strength and hermetic sealing
- Reverse flow prevention shutter for better air tightness

Easy Installation & Maintenance

- Detachable duct adaptor facilitates installation
- Spring-lock louver for easy removal

Safe

- Motor with thermal cut-off fuse prevents fire induced by overheat
- Metallic structure within air stream provides extra safety against fire*

Durable


- Painted steel frame enhances anti-rust capability
- HP (Half-pitch) motor & ball bearing enable continuous operation for years

* Metallic structure reduces fire risk to other areas through the ventilation duct


Metal Ceiling Mount Ventilating Fan



Dimension (Unit : mm)

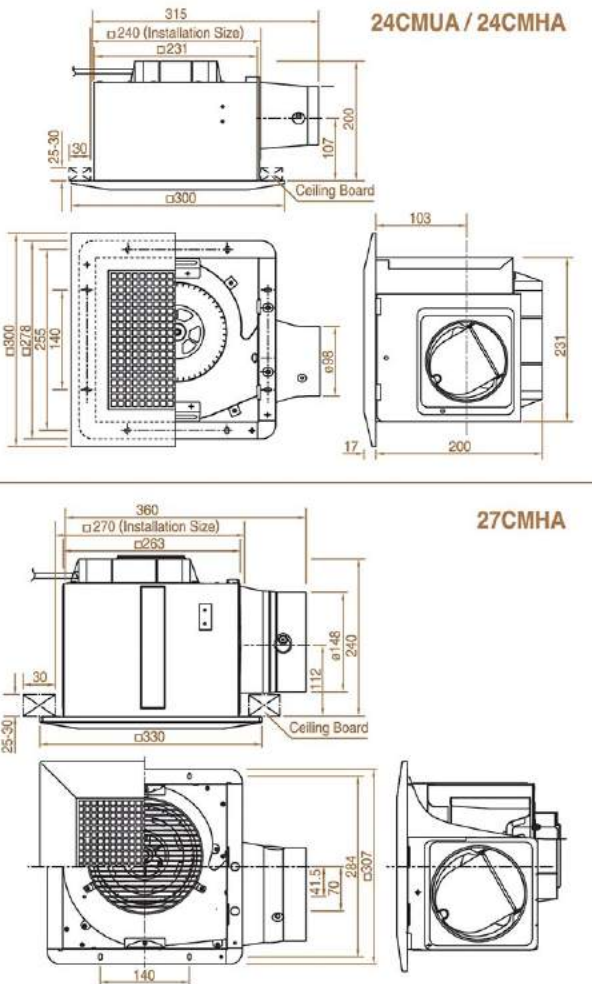

Performance Curve

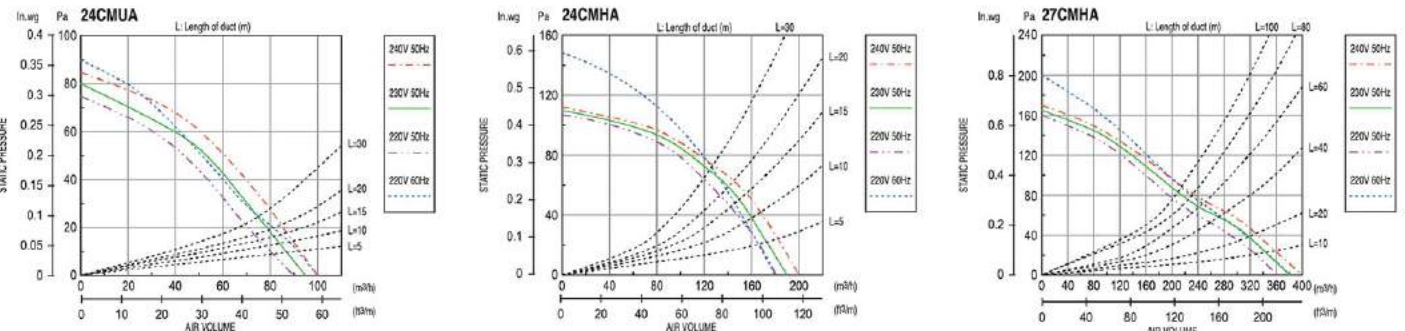

Specification

Model No.	Voltage		Air Volume		Consumption [W]	RPM [min ⁻¹]	Noise [dB(A)]	Weight [kg]	Installation Size [mm]	Duct Size [mm]
	[V]	[Hz]	[m³/h]	[ft³/m]						
24CMUA	220	50	90	53	11	460	25	3.9	240 x 240	ø100
		60	100	59	12	495	26			
	230	50	95	56	12	495	25.5			
24CMHA	240	50	100	59	13	480	26	3.9	240 x 240	ø100
		60	180	106	20	700	37			
	230	50	190	112	22	730	37.5			
27CMHA	240	50	200	118	25	760	38	5.9	270 x 270	ø150
		60	360	212	35	590	37			
	230	50	380	224	43	610	37.5			
	240	50	400	235	43	630	38			

Insulation Class : E / IP Rating : IPX2



KDK Company, Division of PES
4017, Takaki-cho, Kasugai, Aichi, Japan
<http://kdk.jp>

* Actual colors may vary slightly from those shown.
* Specifications are subject to change without prior notice.

CATALOG NO: K-CM001

PRINTED IN HONG KONG (04.17)